


GRIDING YOUR BOAT

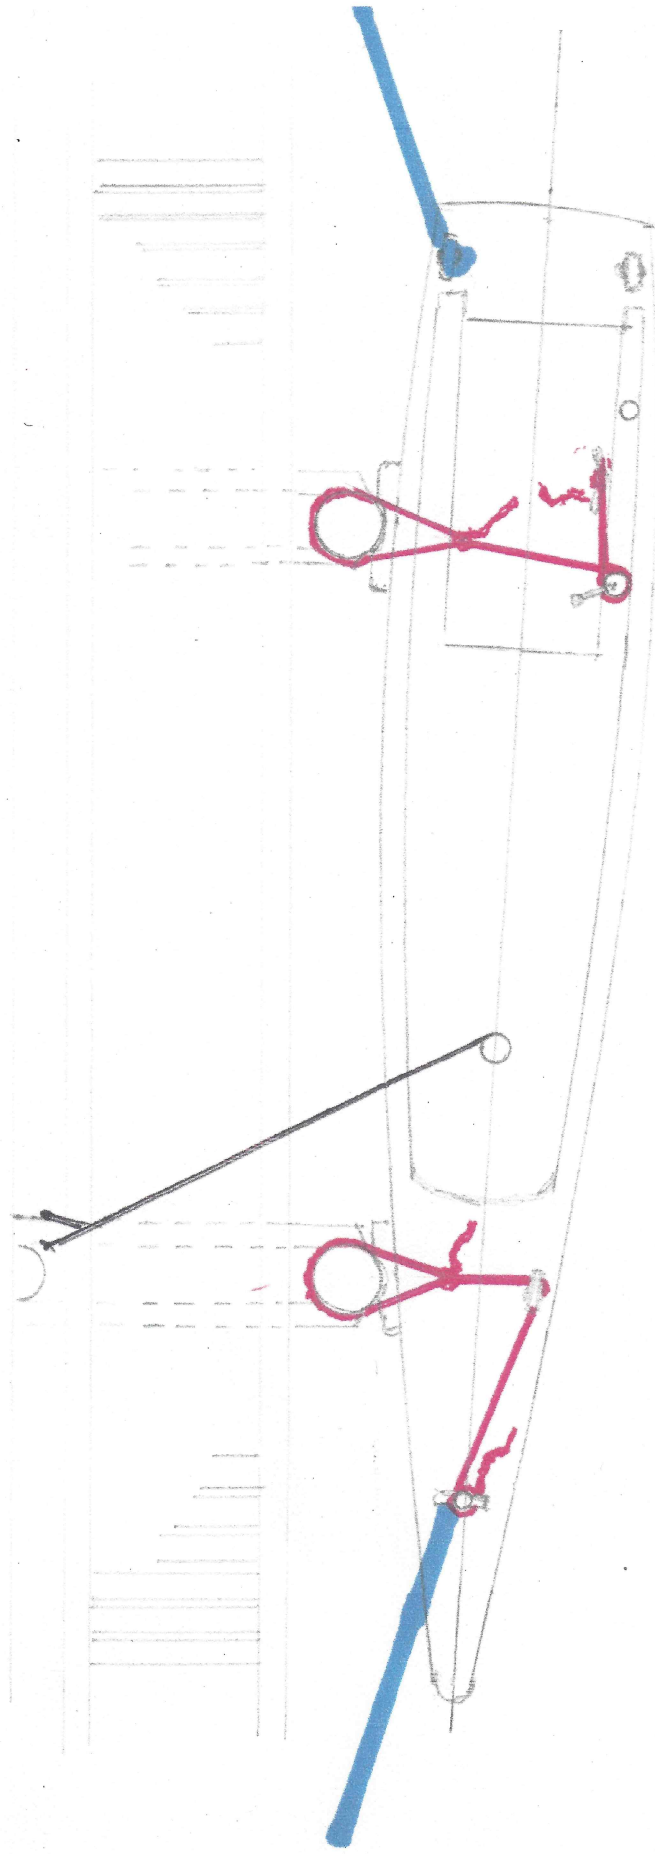

This diagram shows you what would be an ideal set up of lines when using the wharf side grid

Boat must be laying into the piles, move heavy gear ie anchor, chain, sails, water till you achieve about 5 degree list stand back and look at mast angle, if still too upright take a halliard and attach to wharf and pull boat over gently!

You will have to adjust halliard as tide falls to achieve angle of heel just as keel touches down!

You need to know that the boats cleats, are strong and well fastened (bolted not screwed)

Use strong ropes {red lines, if single, should be anchor warp strength} if not use multiple lines.

Blue lines hold boat in fore and aft position and keep boat against piles till tide falls and keel just touches bottom.

You will need to be in attendance as tide falls, as ropes will need to be adjusted!!

When keel touches, the forward red line can be tightened in to hold boat against pile but allow for some movement

Keep aft red line close up but not tight until stern of boat has stopped dropping and then tighten it in, to snug boat against fender and pile. Now tighten up forward red line till firm. Happy scrubbing!